


mob

INSTALLATION INSTRUCTIONS

Wall Concealed Shower System



Before Installation

Check whether the product in the package is consistent with the installation instructions


Make sure the product is suitable for the use environment (pressure : 0.03 MPa - 1 MPa, temperature: 5°C - 9 0°C)

Check whether the product and spare parts are damaged


Turn off the waterway switch before installation

Prepare the tools you may need

Recommend Tools



Dimensions


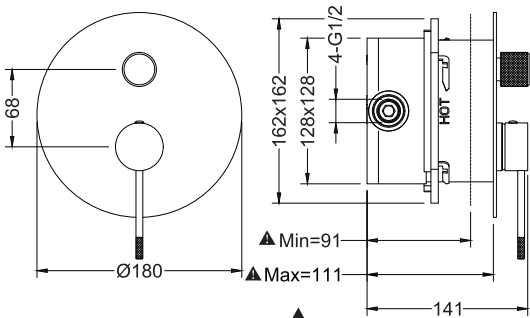


Unit:mm




Ensure that the distance from the bottom of the embedded box to the wall is between this size

Switch regulation






OPEN




CLOSE

Open: Built-in service stops Horizontal
Close: Built-in service stops Vertical

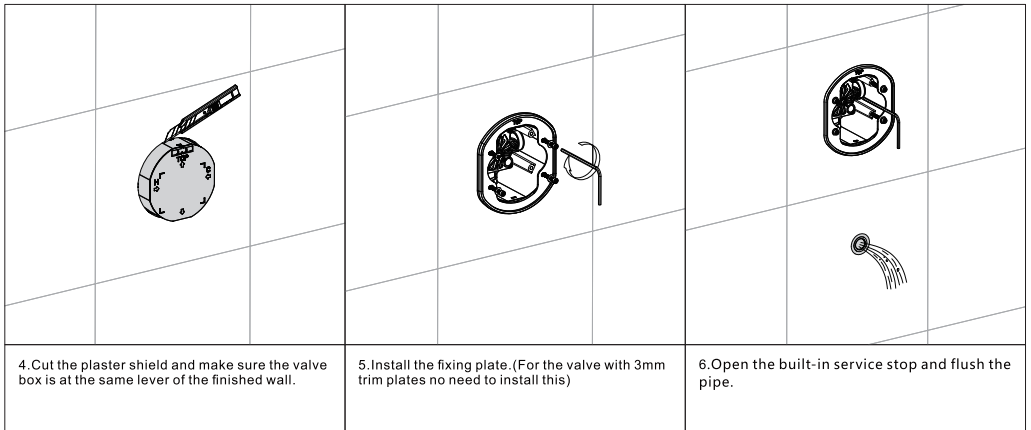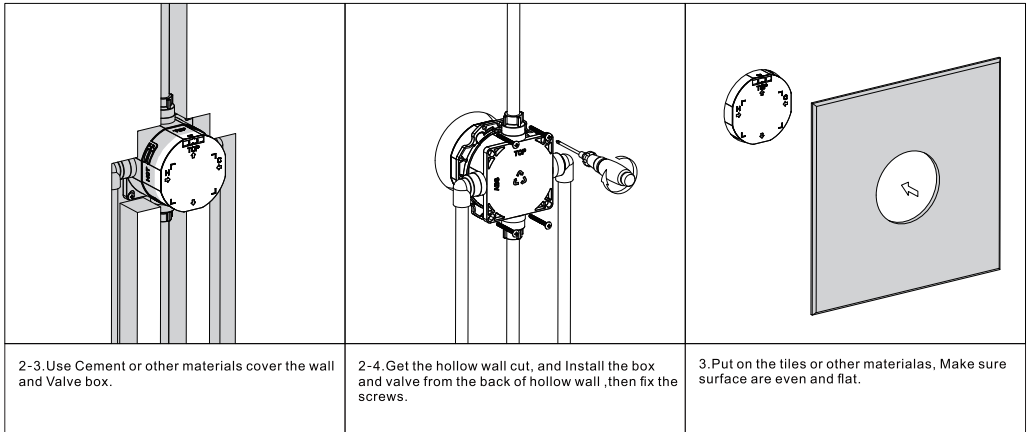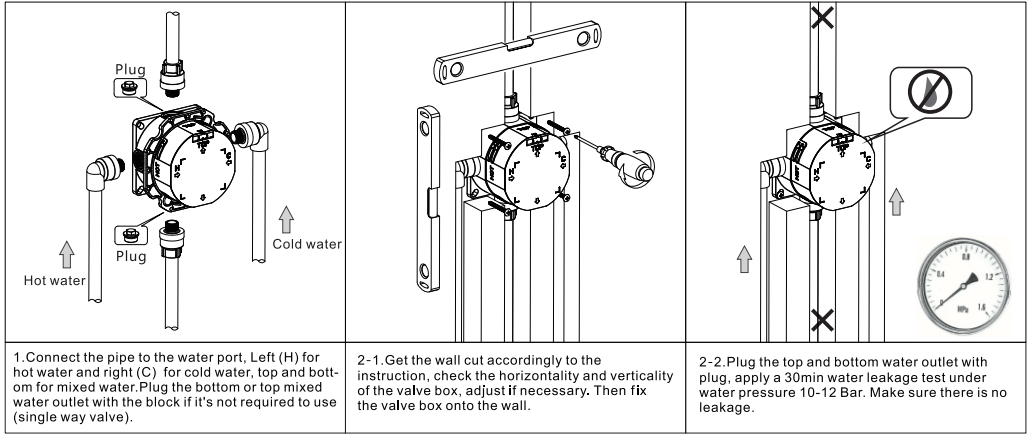

Installation

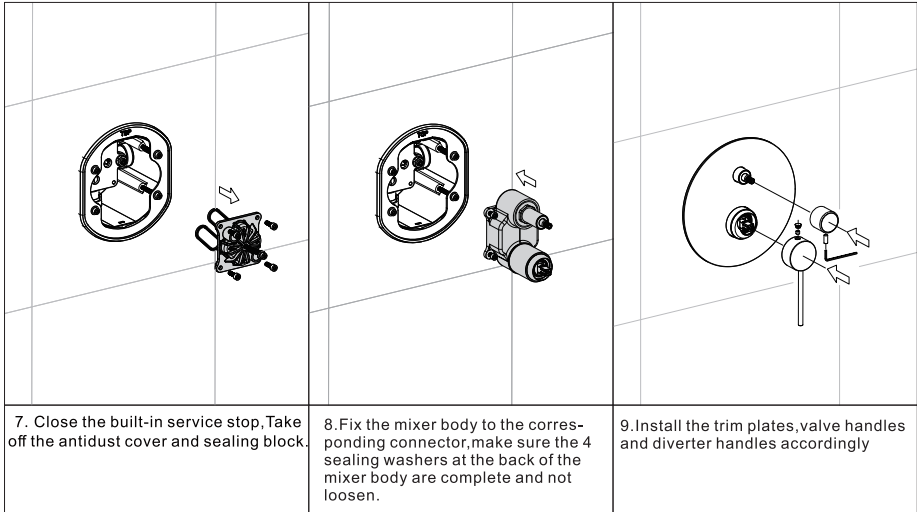

Before Use

In order to ensure the shower functional stability and long-lasting appearance, please follow the following precautions:

The main body of the shower is made of high-quality brass. Brass is soft, so do not hit it with hard objects;

Each component of this product has been professionally assembled and tested before leaving the factory. Non-professionals should not disassemble it to avoid affecting the product warranty;

Do not use this product at overpressure or temperature to avoid excessive harm to your body and irreversible damage to the product;

In order to maintain a better appearance, rinse the surface stains with clean water after each use;

Do not use metal or other hard cleaning tools to clean the product surface to avoid scratching the product;

Do not use acidic or other highly corrosive cleaners to clean the product surface to avoid damaging the product surface coating;

When a product malfunctions, contact the dealer promptly to send a professional to perform maintenance.